

## ASSEMBLY INSTRUCTIONS ITEM NO: BED1007 TWIN/FULL/QUEEN

REMINDER 

DO NOT OVER TIGHTEN ALL BOLTS UNTIL THE BED IS FULLY SET-UP

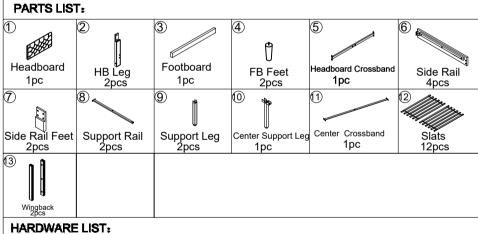


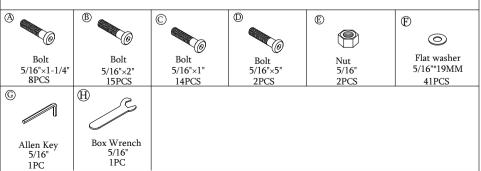

## STEP 1:


At the back of headboard (Part 1) install the HB leg (Part 2) by using hard ware


Use allen key (Part G ) to screw in bolt (Part B ) and washer ( Part F ) on each side ( 2 Bolts & 2 Washers on each side ) . Do not forget about the washer as this will keep your bed sturdy!

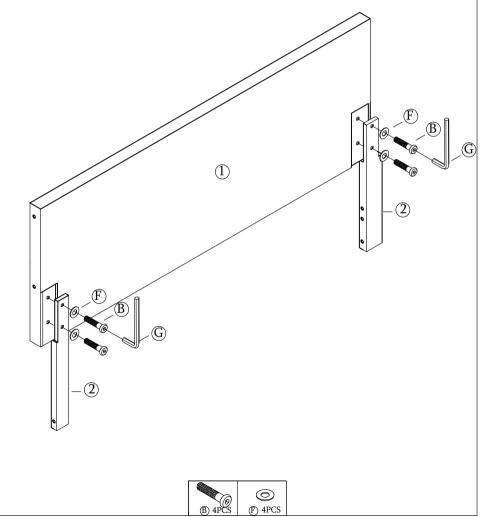

STEP 2: On the headboard (Part 1), install the HB crossband (Part 5) by using hardware provided. Use the Allen Key (Part G) to screw in the bolt (Part C) and the washer (Part F) on each side (2 Bolts & 2 Washers on each side).

STEP 3: Turn the footboard (Part 3) over and screw in the footboard legs (Parts 4)

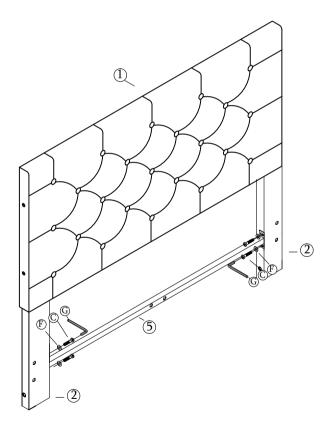

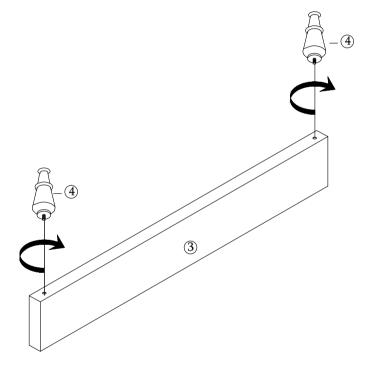







STEP 5: First, lock in your side rail and the footboard in (Look at STEP 4: Now its time to connect the side rails (Part 6), you must line photo). You will now take one side of the completed Side Rail and up 2 (Part 6's) together as shown in the photo. Take the side rail feet bolt that onto the Headboard, make sure the inside of the side rail is (Part 7) and line up the holes of the side rails (You will see 2 holes on facing inside, another way to know it is facing inside is that the Side each side of the side rails to bolt on the Side rail feet (Part 7), Rail feet should be on the inside of the bed. For this step you will pairs of side rails. You will use 2 bolts (Part A) and 2 washers (Part F) need 4 Part C and 4 Part F. on each side rail feet.


STEP 6: You will be doing the same thing for Step 6 that you step 5 (Only difference is your now connecting the right side rail), please refer to step 5 if you are lost. Allen key to tighten it up.

STEP 7: This step requires to properly bolt on the Center Support Rail (Part 8). On each side of the center support rail, you will install 2 support leg (Part 9) which will require Part B, F, & G. Simply put the support leg below the center support rail and use 1 bolts on each legs on top (Washer first then Bolt), and use an Allen key to tighten it up.

Now let's install center support leg (Part 10) shown in the photo which is also a support leg that has a holder on top to hold the weight of the center support rail, use 2 bolts & 2 washers on the leg on top, than use an Allen key to tighten it up.

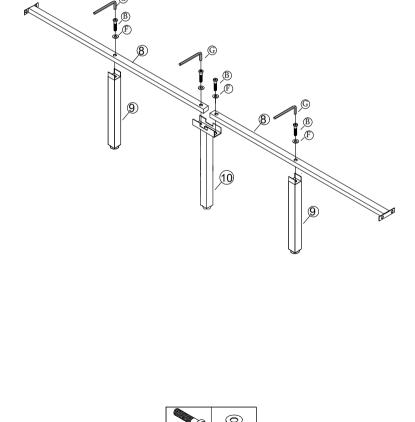

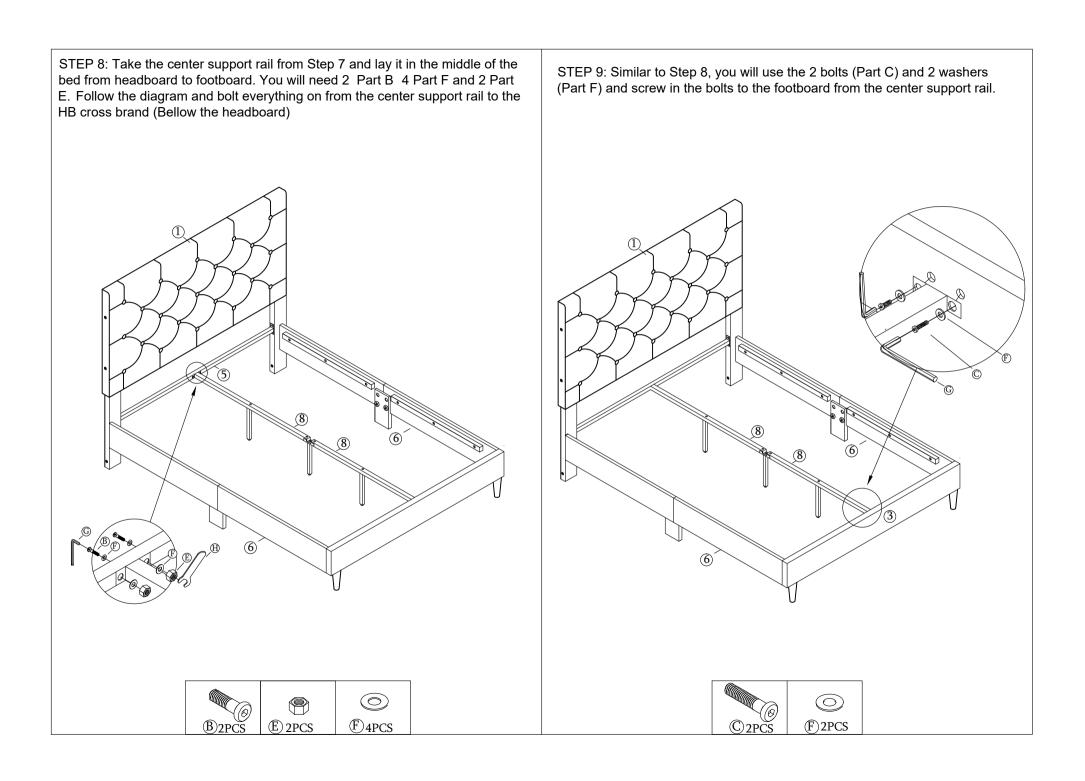

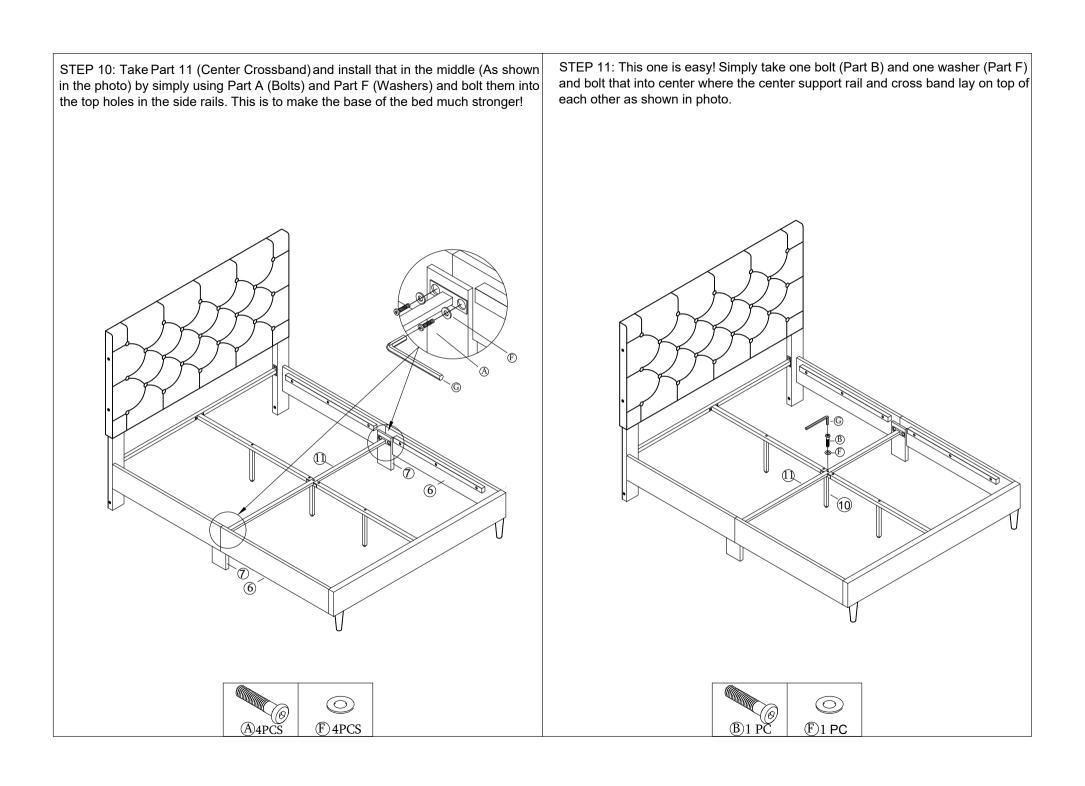

STEP 12: Take Part 13 (Wingback) and install that on the both side of STEP 13: Simply take 2 bolts ( Part D ) and 2 washer ( Part F ) and bolt that in to the bottom holes on HB leg and wingback than you guy can tighten up all headboard ( As shown in the photo ) by using Part B ( Bolts ) and Part F the bolts used on step12 and step 13 ( Washers ) and bolt them into the holes, make sure the holes are lined up before installation, and please do not over tighten all the bolts until we finished step 13 F)4 PCS F)2 PCS

STEP 14: Put the back fabric down to bottom, than smooth it by STEP 15: You're almost therel Simply lay the Slats on the sides of the side ralls (On the Inside) you can roll them out and the velcro velcro stick right. stick right on (Part 12)

STEP 16: Congratulations, you made it to the end! Time to sleep like a baby and don't forget to leave us a positive review when you wake up =)